

Response of tomato plants to diesel fuel, gasoline and benzene

Respuesta de plantas de tomate al combustible diesel, gasolina y benceno

Álvaro Morelos-Moreno¹, José Fernando Martel-Valles², América Berenice Morales-Díaz³,
Rahim Foroughbakhch-Pournavab², Isidro Morales⁴, and Adalberto Benavides-Mendoza⁵

¹ CONACYT-Universidad Autónoma Agraria Antonio Narro, ⁵ Departamento de Horticultura, Universidad Autónoma Agraria Antonio Narro. Calzada Antonio Narro 1923, Buenavista. 25315 Saltillo, Coahuila, México.

[‡] Corresponding author (abenmen@gmail.com)

² Universidad Autónoma de Nuevo León, Facultad de Ciencias Biológicas. Ave. Pedro de Alba s/n cruz con Ave. Manuel L. Barragán, Ciudad Universitaria. 66400 San Nicolás de los Garza, Nuevo León, México.

³ CINVESTAV Unidad Saltillo, Robótica y Manufactura Avanzada. Av. Industrial Metalurgia no. 1062, Parque Ind. Ramos Arizpe. 25900 Ramos Arizpe, Coahuila, México.

⁴ Instituto Politécnico Nacional, CIIDIR-Oaxaca. Calle Hornos 1003, Santa Cruz Xoxocotlán. 71230 Santa Cruz Xoxocotlán, Oaxaca, México.

SUMMARY

Oil and gas industry produces wastewater (produced water), which contains hydrocarbons, heavy metals, and other components, such as mineral salts essential for plant nutrition. Hydrocarbons presence on produced water limits its potential use in the agriculture, as its lead to inhibition of plant growth. The present study aimed to investigate the effect of hydrocarbons analogous contained in the produced water on 1) pH and electrical conductivity (EC) of irrigation leachate, 2) plant's morphological variables, 3) mineral concentration, 4) fruit pH, EC and total dissolved solids (TDS), during flowering and fruiting stages in tomato grown into greenhouse conditions. As source of produced water were used diesel at concentrations of 20 and 25 mg L⁻¹, gasoline at 40, 50 and 60 mg L⁻¹, and benzene at 75 mg L⁻¹, applied in the substrate by means of a syringe. All plants treated with hydrocarbons reached the fruit setting and ripening stage at the 6-cluster. Depending on their type, concentration, and exposure time, hydrocarbons modified the pH and EC of the irrigation leachate, caused significant morphological changes with longer exposure time, and restricted the biomass production. Mineral concentration differed significantly among plant organs, affecting mainly the sodium uptake in stems and fruits. The variables of fruit quality, EC and TDS were favorably modified by most treatments.

Index words: *fruit quality, hydrocarbon fractions, Solanum lycopersicum L., wastewater.*

RESUMEN

La industria petrolera produce agua de desecho (agua producida), la cual contiene hidrocarburos, metales pesados, y otros componentes, tales como sales minerales esenciales para la nutrición vegetal. La presencia de hidrocarburos en las aguas producidas limita su uso potencial en la agricultura, como su efecto en la inhibición del crecimiento de las plantas. Esta investigación tiene el objetivo de investigar el efecto de los hidrocarburos contenidos en las aguas producidas, en 1) el pH y la conductividad eléctrica (CE) del agua de riego drenada, 2) variables morfológicas de las plantas, 3) concentración mineral, 4) pH, CE y sólidos solubles totales en el fruto (SST), durante las etapas de floración y fructificación en tomate cultivado en invernadero. Como fuente de las aguas producidas se utilizó diésel en concentraciones de 20 y 25 mg L⁻¹, gasolina en 40, 50 y 60 mg L⁻¹, y benceno en 75 mg L⁻¹, aplicados en el sustrato con una jeringa. Todas las plantas tratadas con hidrocarburos alcanzaron la formación de frutos y etapa de maduración del 6to. racimo. Dependiendo del tipo, concentración, tiempo de exposición, los hidrocarburos modificaron el pH y la CE del agua de riego drenada, causaron cambios significativos en la morfología con en tiempos prolongados de exposición, y restringieron

Recommended citation:

Morelos-Moreno, Á., J. F. Martel-Valles, A. B. Morales-Díaz, R. Foroughbakhch-Pournavab, I. Morales, and A. Benavides-Mendoza. 2019. Response of tomato plants to diesel fuel, gasoline and benzene. *Terra Latinoamericana* 37: 425-435.
DOI: <https://doi.org/10.28940/terra.v37i4.543>

Received: April 12, 2019.

Accepted: June 21, 2019.

Published in *Terra Latinoamericana* 37: 425-435.

la producción de biomasa. La concentración mineral mostró diferencias significativas entre los órganos de las plantas, afectando principalmente la absorción de sodio en los tallos y frutos. Las variables de calidad del fruto, CE y SST fueron modificados favorablemente por la mayoría de los tratamientos.

Palabras clave: *calidad de fruto, fracción hidrocarbano, Solanum lycopersicum L., agua producida.*

INTRODUCTION

Wastewater (produced water) is a byproduct of oil and natural gas extraction industry, originated in the formations holding oil and gas or from the water previously injected for oil and gas extraction (Clark and Veil, 2009; Martel-Valles *et al.*, 2016). Physicochemical composition of the produced water varies considerably according to the geographic location, the geologic formation, the type of hydrocarbon and the lifetime of a reservoir (Clark and Veil, 2009). Produced water with high salinity can reach until five or six times the total dissolved solids of seawater (Martel-Valles *et al.*, 2016). According to Mexican Official Standard NOM-143-SEMARNAT-2003 (2005) and (Martel-Valles *et al.*, 2013, 2014), wastewater contains compounds of low molecular weight, such as BTEX (benzene, toluene, ethylbenzene, xylene), organic acids, condensates, oils, fats, polycyclic aromatic hydrocarbons (PAHs), and phenols. Most oil producing countries do not use secondary wastewaters, due to most reservoirs have high amounts of salts and hydrocarbons (Veil *et al.*, 2004).

Agriculture uses 76.9% of available fresh water, which comes from groundwater reservoirs, being overexploited the most of these (CONAGUA, 2016). Wastewater characterization has been suggested by oil industry in order to determine its potential use in productive activities (NOM-143-SEMARNAT-2003, 2005; Martel-Valles *et al.*, 2016). Produced water contains minerals essential for plant nutrition such as K, Ca, Mg, Na, Zn, Cu, SO₄, CO₃, Cl, and NO₃, among others. Produced water can be used to irrigate crop plants at low salinity conditions, however the hydrocarbons of produced water can be toxic to plants (Martel-Valles *et al.*, 2014, 2016). According to NOM-001-ECOL-1996 (1997) the maximum permissible limits of heavy metals and cyanides in wastewater

discharges in soils for agricultural use are 0.005, 0.05, 0.2, 0.5, 0.5, 2, 2, 4 and 10 mg L⁻¹ for Hg, Cd, As, Cr, Pb, Ni, CN⁻, Cu and Zn, respectively.

Maximum permissible limit for hydrocarbons in produced water discharge is 15 mg L⁻¹ for freshwater collection systems and 40 mg L⁻¹ for coastal waters and marine areas (NOM-143-SEMARNAT-2003, 2005). Produced water with low hydrocarbon concentration can be used for irrigation in agricultural soils, and can stimulate the plant growth (Martínez and López, 2001).

Hydrocarbons are chemical organic compounds that consist of carbon and hydrogen atoms (NOM-138-SERMANAT/SSAI-2012, 2013), as result of pyrolysis process to produce energy fuels from the addition of heat and temperature (Demirbas, 2008). Hydrocarbons are divided in light (LHF), middle (MHF) and heavy hydrocarbon fraction (HHF), with linear chain molecules of C₅ to C₁₀, C₁₀ to C₂₈, and C₂₈ to C₄₀ carbon atoms, respectively (Figure 1). Depending on the distillation process and boiling ranges, the main petroleum products are diesel fuel, gasoline, jet fuel, and kerosene (Herod *et al.*, 2007). Benzene, toluene, ethylbenzene, and xylene (BTEX) are components of crude oil and gasoline (NOM-138-SERMANAT/SSAI-2012, 2013).

Hydrocarbons represent an ecological risk for terrestrial and aquatic flora and fauna (Heiss-Blanquet *et al.*, 2005), through direct ingestion or contact, absorption, uptake, and inhalation of vapors and particles (Sri Ranjan *et al.*, 2006). Light or volatile hydrocarbons, such as BTEX imply a risk of air pollution (Saval *et al.*, 2004), whereas gasoline and diesel pollute soil and groundwater (Altamirano-Sánchez and Fernández-Villagómez, 2001).

Hydrocarbons in agricultural soils cause root asphyxia, reduce soil fertility, subtract vigor to plant growth, and reduce the yield (Bravo, 2005), inhibit germination and reduce vegetal growth and plant biomass (Rivera-Cruz and Trujillo-Narcía, 2004), and at high concentrations (45 to 70%) disrupt the water capture and reduce the field capacity (Adams-Schroeder, 1999). They also represent a significant risk to populations of microorganisms responsible for biogeochemical processes (Joner *et al.*, 2006). Benzenes are carcinogenic due to their hydroxylated metabolites, cause leukemia in humans when drinking water contains benzene at 0.1 mg L⁻¹ (FAO/WHO, 2011).

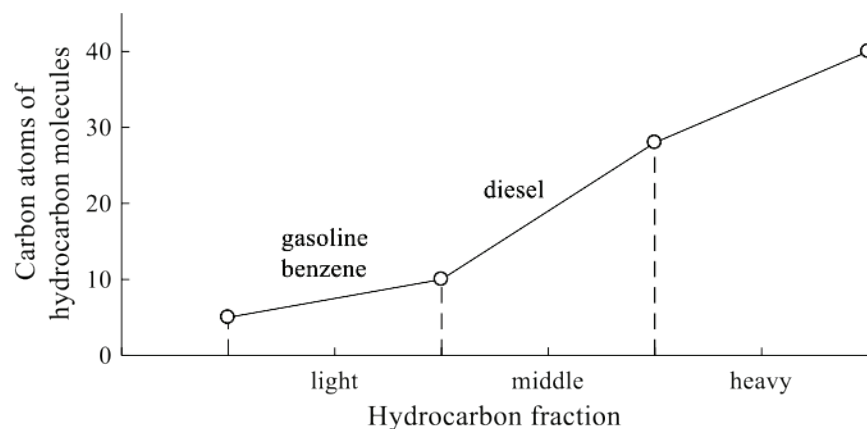


Figure 1. Hydrocarbon fraction according to molecule linear chain of carbon atoms (built from NOM-138-SERMANAT/SSAI-2012, 2013).

Several studies show the effects of using oil-contaminated water for crop irrigation. Jackson and Myers (2002) applied connate water in tomato and lettuce plants and reported reductions in mineral absorption and decreased production. Martel-Valles *et al.* (2013) used connate water to irrigate tomato plants and reported that its use was feasible, although with biomass reduction and nutritional imbalances. Similarly, Martel-Valles *et al.* (2014) showed that plants irrigated with MHF-containing water decreased leaf dry weight and stem diameter without changes in fruit production, and without hydrocarbon absorption of MHF, LHF or BTEX in the fruits.

The damage caused by hydrocarbons found in produced water depends on the type of hydrocarbon (Pentreath *et al.*, 2015) and its quantity, composition, exposure time, and physical state (Manfra *et al.*, 2010). However, the presence of hydrocarbon mixtures and other compounds in produced water makes it difficult to distinguish the characteristic damage caused by each component to the plants (Martel-Valles *et al.*, 2014, 2016). Consequently, the objective of this study was to evaluate the impact of applying three different types of hydrocarbons to the substrate, i.e., diesel at 20 and 25 mg L⁻¹, gasoline at 40, 50, and 60 mg L⁻¹, and benzene at 75 mg L⁻¹. Specifically, the chemical characteristics of the irrigation leachate were determined, as well as the plant morphological variables, and mineral distribution in the root, stem, leaf and fruit of tomato plants in both the flowering and fruiting stages.

MATERIALS AND METHODS

Experimental Site and Used Crop

The experiment was conducted in a greenhouse at Agrarian Autonomous University Antonio Narro in Saltillo, Mexico: 25° 22' N, 101° 00' W, altitude 1760 m. The crop cycle extended from 14 February to 17 July 2015. Seeds of beefsteak tomato (*Solanum lycopersicum* L.) cv. Montecarlo with an indeterminate growth habit were seeded in polystyrene trays. After 31 days, seedlings were transplanted into black, 16 L, rigid polyethylene containers, using a mixture of peat moss and perlite as the substrate (1:1 v/v). Before transplanting the plants were irrigated for 14 days with Steiner's nutrient solution at 25% concentration (Steiner, 1961).

Crop Establishment

Plant irrigation was carried out three times a day (09:00, 13:00, and 18:00 h) using a drip irrigation system with high-flow outlets. Steiner's nutrient solution was applied during the first two irrigation events; only water was used in the last irrigation event. Each plant received 500 mL of irrigation water per day. The concentration of Steiner's nutrient solution was adjusted according to plant growth: 25, 50, 75 and 100% concentration was used 14, 32, 50 and 80 days after transplanting (DAT), respectively. The pH of the

nutrient solution was maintained at 6.5 by adding the necessary quantity of concentrated (94%) H_2SO_4 .

Treatments and Hydrocarbon Concentrations

The experiment consisted of seven treatments: a control and six hydrocarbons concentrations: diesel 20 and 25 mg L⁻¹, Magna gasoline 40, 50 and 60 mg L⁻¹, and benzene 75 mg L⁻¹. These concentrations were set based on the results of previous studies (Martel-Valles *et al.*, 2013, 2014), and exceed the limit of 15 mg L⁻¹ of hydrocarbons discharged in agricultural soils at monthly weighted average, established by the Mexican Official Standards NOM-138-SEMARNAT/SSAI-2012 (2013) and NOM-001-ECOL-1996 (1997). Hydrocarbon concentrations were computed for a volume of 500 mL per plant per day throughout the experiment, and were applied during the third irrigation event by using a syringe. Crop management consisted of performing standard tasks of pruning and training recommended for the cultivation of greenhouse tomato. applied to the substrate, that is.

pH and EC of Irrigation Leachate

Both pH and electrical conductivity (EC) were monitored in the irrigation leachate. Plastic containers placed beneath the pots in five plants per treatment were used. The measurements were conducted from 14 to 128 DAT after the third irrigation event by using a portable HI98130 pH/Conductivity/TDS Tester (Hanna Instruments Inc.).

Morphological Variables

To evaluate the morphological variables, four plants per treatment were randomly selected at the flowering stage (32 DAT), and five plants per treatment were randomly selected at the fruiting stage (128 DAT). The following measurements were collected: height, measured from the stem base to the apex; stem diameter; and the dry weight of the leaves, stems and fruits. Dry fruit weight was measured on ripe fruits from five plants per treatment. The measurements were performed weekly from first- through sixth-cluster (93 to 128 DAT). The samples were dried in an oven at 60 °C for 72 h. The fruit dry weight per plant was computed as the sum of the six samplings.

Mineral Concentration

Determination of minerals (N, P, K, Ca, Mg, Na, Fe, Cu, Zn, Mn, Mo, Ni, Cd, and Pb) in the root, stem, and leaf at the flowering and fruiting stages was carried out on the same plants selected for the determination of the morphological variables, at 32 and 128 DAT. The samples were dried and subjected to acid digestion (AOAC, 1980) before analysis using an Optima 8300 ICP-OES plasma emission spectrophotometer (Perkin Elmer Inc.). Nitrogen was determined using the micro-Kjeldahl method (AOAC, 1980). Determination of fruit minerals was carried out using the same techniques described for the plant roots, stems, and leaves, at 100 and 128 DAT.

Fruit Quality

To assess fruit quality, five ripe fruits from five plants per treatment were randomly selected at 128 DAT for the determination of pH, EC, and total soluble solids (TSS). Ripe, whole fruit pulp was used for the determination of these variables. A portable HI98130 pH/Conductivity/TDS Tester (Hanna Instruments Inc.) was used to measure pH and EC, while an ATAGO MASTER-BR refractometer (ATAGO U.S.A., Inc.) was used to measure TSS.

Experimental Design

Experimental design was completely randomized with 20 plants per treatment. The experimental unit was a potted plant. The variables were subjected to analysis of variance (ANOVA) and Fisher's least significant difference (LSD) test ($\alpha \leq 0.05$) by using the R program (R Core Team, 2015).

RESULTS AND DISCUSSION

Irrigation Leachate

Table 1 shows the mean values categorized according to the results of Fisher's test ($P \leq 0.05$). Despite the fact that statistically significant differences were observed, the pH values of leachate remained close to each other, with differences of 0.09 to 0.18 of pH unit. On average the pH value was lower in the flowering stage compared to the fruiting stage. But

Table 1. Average values of irrigation leachate pH and EC in tomato plants treated with different concentrations of hydrocarbons on the flowering and fruiting stages.

Treatment	Flowering		Fruiting	
	pH	EC	pH	EC
mg L ⁻¹		dS m ⁻¹		dS m ⁻¹
Test	7.13 a	1.17 abc	7.38 b	3.07 b
Diesel 20	7.12 ab	1.20 a	7.31 c	2.97 bc
Diesel 25	7.04 c	1.17 abc	7.37 b	3.00 bc
Gasoline 40	7.12 ab	1.12 c	7.33 bc	3.01 bc
Gasoline 50	7.11 ab	1.20 a	7.49 a	3.02 bc
Gasoline 60	7.06 bc	1.18 ab	7.46 a	3.49 a
Benzene 75	7.04 c	1.14 bc	7.36 bc	2.90 c

Different letters in the same column indicate statistically significant differences (Fisher's test, $\alpha \leq 0.05$).

again the differences were only a couple of tenths of pH. On the other hand, there was no significant difference that could be attributed to the presence of hydrocarbons. Regarding the EC, the main difference was found between the flowering and fructification stage, with three times higher values in the last stage. Again, there was no significant difference that could be attributed to the presence of hydrocarbons.

The hydrocarbon concentrations did not modify significantly ($P > 0.05$) the leachate EC at the flowering stage respect to test treatment, and the exposure time allowed modify significantly ($P \leq 0.05$) the EC at the fruiting stage with gasoline 60 mg L⁻¹ (+) and benzene 75 mg L⁻¹ (-). Whilst the leachate pH only showed significant reduction ($P \leq 0.05$) with the higher concentrations of the three used hydrocarbons at the flowering stage respect to test treatment, and only changed significantly ($P \leq 0.05$) with gasoline 50 and 60 mg L⁻¹ (+) and diesel 20 mg L⁻¹ (-) at fruiting stage (Table 1).

Adams *et al.* (2008) mentioned changes in soil pH and EC without indicate the quantity and percent, but this does not allow predict the behavior of pH and EC in substrate, due to different physical and biochemical properties of soil and substrate. Although the used hydrocarbon concentrations exceeded the limit of 15 mg L⁻¹ established by the Mexican Official Standards NOM-138-SEMARNAT/SSAI-2012 (2013) and NOM-001-ECOL-1996 (1997), was not found a defined effect of light, middle and heavy hydrocarbon fractions at leachate pH and EC.

The changes observed in the leachate pH and EC were not associated with the presence of hydrocarbons, which ruled out a process of rapid root intoxication (Petenello *et al.*, 2014) that could induce modifications in pH or EC. Benzene capability to dissolve ionic compounds is very limited, due to its very nonpolar character (Himmel *et al.*, 2010), and similar to other hydrocarbons doesn't modify the pH value in the leachate solution, which is a specific property of the aqueous solutions. Debye-Hückel effects diminish effective acidity level that may be reached in benzene only at concentrations higher than 1×10^{-6} mol L⁻¹ (Himmel *et al.*, 2010), however the used concentration at benzene 75 mg L⁻¹ (9.6×10^{-6} mol L⁻¹) increased the leachate acidity respect to test treatment on the flowering and fruiting stages.

Morphological Variables

Applications of LHF (gasoline and benzene) did not modify significantly ($P > 0.05$) the plant morphology respect to corresponding test treatments in the flowering stage (28 DAT), except gasoline 40 mg L⁻¹ which increased significantly ($P \leq 0.05$) the stem diameter. MHF modified significantly ($P \leq 0.05$) the plant morphology respect to corresponding test treatments in opposite way, that is, significant increments of the stem diameter and plant height with diesel 20 mg L⁻¹, which can be attributed to a phenomenon known as hormesis, an adaptive feature characterized by increased responses at low concentrations of a pollutant (Rojas-Loria *et al.*, 2012), but significant reductions of the leaf and stem dry weights with diesel 25 mg L⁻¹ (Figure 2a), as has been reported by Martel-Valles *et al.* (2013, 2014).

In the fruiting stage (132 DAT) the hydrocarbon concentrations did not modify significantly ($P > 0.05$) the fruit dry weight and stem diameter respect to corresponding test treatments. MHF did not modify significantly ($P > 0.05$) the plant morphology respect to corresponding test treatments, except diesel 25 mg L⁻¹, which decreased significantly the leaf dry weight. LHF modified significantly ($P \leq 0.05$) the plant morphology respect to corresponding test treatments in opposite way, that is, significant reductions of the leaf dry weight (gasoline 50 mg L⁻¹) and stem dry weight (gasoline 40, 50 mg L⁻¹ and benzene 75 mg L⁻¹), and significant increments of the plant height (gasoline 50 mg L⁻¹) (Figure 2b). The stem dry weight and plant height decreased in response to benzene application due to

the plant stress caused by high benzene concentrations (Pessarakli, 2011). The negative effects of gasoline in the leaf and stem dry weights, are surely related to gasoline toxicity (Quiñones-Aguilar *et al.*, 2003) and to changes in plant nutrient availability (Holwerda, 2006).

Exposure time from flowering stage (28 DAT) to fruiting stage (132 DAT) inhibited the effect of MHF in the plant morphology, except in the leaf dry weight (diesel 25 mg L⁻¹), while the effect of LHF was inhibited in the stem diameter (gasoline 40 mg L⁻¹), affected negatively the leaf dry weight (gasoline 50 mg L⁻¹), and the stem dry weight (gasoline 40, 50 mg L⁻¹ and benzene 75 mg L⁻¹), and affected positively the plant height (gasoline 50 mg L⁻¹) (Figures 2a and 2b).

Mineral Concentration

In the fruiting stage (132 DAT), the hydrocarbons modified the mineral concentration in the roots with significant increments ($P \leq 0.05$) from 54.4 > 34.7 > 29.9 > 24.8% for N gasoline > P benzene > P diesel > Ca benzene, and significant reductions ($P \leq 0.05$) from 40.6 > 33.7 > 23.9% for Na benzene > Na gasoline > Mg gasoline, respect to corresponding test treatments. The significant differences ($P \leq 0.05$) of mineral concentrations in the root were due to the fact that the hydrocarbons were applied in the substrate, as reported for other pollutants such as heavy metals (Dubey *et al.*, 2014).

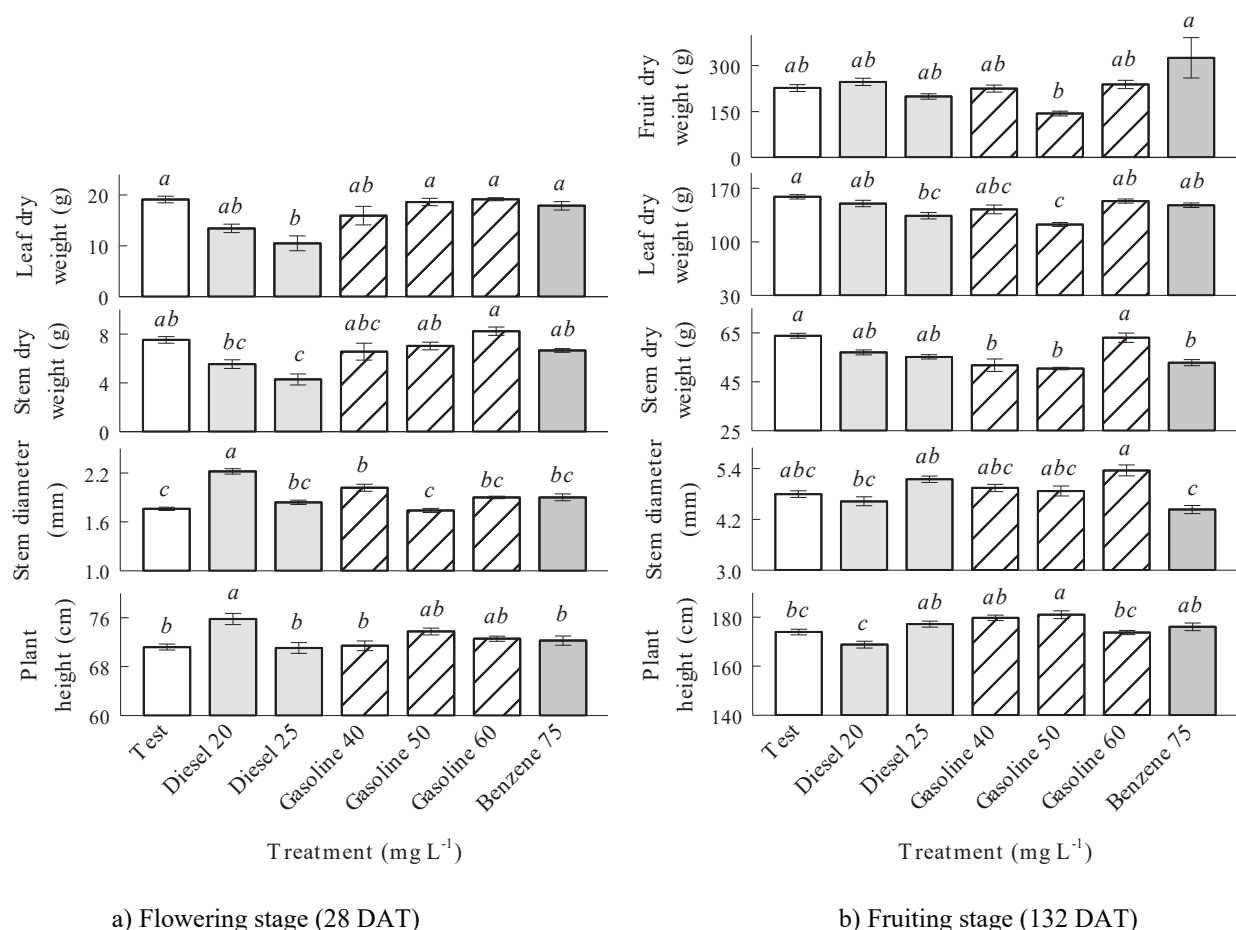


Figure 2. Mean values and standard error of morphological variables evaluated in tomato plants treated with hydrocarbons to different concentrations. Different letters above the bars in the same variable in each growth stage indicate significant differences (Fisher's test, $\alpha \leq 0.05$).

In the stem were observed significant increments ($P \leq 0.05$) greater than 100% for Fe gasoline > Mn gasoline, and significant reductions ($P \leq 0.05$) from 83.7 > 76.5 > 76.0 > 54.3 > 50.1 > 41.5 > 34.0 > 29.5 > 26.4% for Cu gasoline > Cu benzene > Cu diesel > Mg gasoline > Zn gasoline > Zn diesel > Mg benzene > Mg diesel > Ca gasoline, respect to corresponding test treatments. The significant effect of hydrocarbon in the mineral concentration of the stem, suggests the involvement of signaling between the root tissues and the stems without changes in the absorption of the minerals (Moya *et al.*, 2015). The increase of the stem diameter and crop height with diesel 20 mg L⁻¹, maybe related to the possible presence of arbuscular

mycorrhizal fungi associated to remediation of diesel polluted soil, which can stimulate early growth stages in seedlings (Trejo *et al.*, 2013), and plant growth when applied below the toxic limits (Pessarakli, 2011) and depending on the concentration and exposure time (Martínez and López, 2001).

In the leaves were observed significant increments ($P \leq 0.05$) from 59.0 > 47.2 > 46.3 > 42.6% for Fe gasoline > Mg gasoline > N diesel > Mn gasoline, and a significant decrement ($P \leq 0.05$) in 47.8% for Na with gasoline, respect to corresponding test treatments (Table 2).

In the fruiting stage, the exposure time of hydrocarbons allowed the expression of the observed

Table 2. Mineral concentration in the root, stem and leaf of tomato plants treated with hydrocarbons to different concentrations on the fruiting stage (132 DAT).

Treatment	N	P	K	Ca	Mg	Na	Fe	Cu	Zn	Mn
mg L ⁻¹	----- g kg ⁻¹ ----- mg kg ⁻¹ -----									
Root										
Test	14.51bc	2.51c	15.50a	22.97b	3.85ab	2.76a	261.27ab	18.42a	74.94ab	128.54a
Diesel 20	16.60b	3.07abc	16.29a	24.92b	3.82ab	2.54ab	192.17b	18.58a	82.50a	82.38a
Diesel 25	15.42bc	3.26ab	16.06a	23.10b	3.87a	2.35abc	331.41a	18.68a	83.16a	115.32a
Gasoline 40	13.93bc	2.52bc	16.32a	22.17b	3.12bc	2.05abc	258.25ab	14.98a	76.07ab	107.08a
Gasoline 50	22.40a	2.70abc	16.58a	22.78b	3.24abc	2.00abc	215.05ab	16.06a	100.62a	118.22a
Gasoline 60	12.75c	2.65abc	18.52a	22.73b	2.93c	1.83bc	235.46ab	16.34a	88.76a	121.26a
Benzene 75	13.83bc	3.38a	15.36a	28.66a	3.98a	1.64c	252.04ab	16.34a	45.80b	128.83a
Stem										
Test	14.27a	6.04a	18.13a	14.16ab	5.80a	0.54a	75.06b	40.80a	128.54ab	24.10b
Diesel 20	14.26a	6.76a	13.35a	13.16bc	4.15bc	0.41a	30.58b	9.78b	84.60bc	29.78b
Diesel 25	15.27a	6.66a	16.77a	13.95ab	4.09bc	0.45a	22.83b	10.36b	75.20c	13.70b
Gasoline 40	11.70a	5.51a	13.35a	10.42c	2.65d	0.33a	20.60b	6.64b	64.10c	24.54b
Gasoline 50	12.89a	7.09a	15.77a	15.94ab	5.31ab	0.39a	45.48b	19.72ab	106.42abc	29.38b
Gasoline 60	13.45a	7.53a	15.90a	16.64a	4.15bc	0.65a	330.16a	13.50b	141.56a	76.10a
Benzene 75	12.73a	7.68a	15.25a	15.41ab	3.83cd	0.41a	120.61b	9.58b	101.10abc	24.94b
Leaf										
Test	16.82bc	3.49a	14.43a	37.78ab	3.22b	0.46ab	94.37b	8.66ab	20.28a	246.06b
Diesel 20	14.91c	3.11a	20.57a	40.03ab	3.52ab	0.43ab	120.02ab	8.64ab	9.18a	214.42b
Diesel 25	24.60a	3.64a	15.84a	42.91ab	3.81ab	0.36bc	113.03ab	8.56ab	6.46a	251.90b
Gasoline 40	18.45abc	3.51a	17.63a	42.35ab	3.66ab	0.35bc	105.95ab	8.20b	6.06a	227.16b
Gasoline 50	22.58ab	4.82a	23.14a	46.02a	4.74a	0.52a	150.08a	10.42a	20.40a	247.54b
Gasoline 60	19.50abc	2.69a	21.35a	36.68b	3.02b	0.24c	122.82ab	8.42b	13.08a	350.78a
Benzene 75	20.91abc	3.40a	15.57a	42.73ab	3.84ab	0.36bc	114.13ab	8.46b	5.60a	239.20b

Mineral concentrations are based on dry mass. Different letters in the same column in each plant organ indicate significant differences (Fisher's LSD, $\alpha \leq 0.05$).

responses (Manfra *et al.*, 2010), and the consequent significant modifying of the mineral concentration in the different plant parts, analogous to those described by Martel-Valles *et al.* (2013, 2014). It is possible that hydrocarbons may modify signaling between different plant organs by means of growth regulators (Stirk and van Staden, 2014) or through changes in metabolism (Hermans *et al.*, 2006). Martel-Valles *et al.* (2013) did not found detectable amounts of hydrocarbons in tomato fruits, which reject the theory about the hydrocarbon can be uptaked by the roots and transported to the stems, leaves and fruit, where their toxicity would modify the cell activity, changing the mineral concentration and other metabolic processes.

In the tomato fruits at 100 DAT the hydrocarbons modified significantly ($P \leq 0.05$) the mineral concentrations respect to corresponding test treatments, with significant increments greater than 100% for Mn gasoline > Cu gasoline, and 85.1% for Ca gasoline, and significant decrements from 67.4 > 36.2 > 20.9% for Na gasoline > Cu benzene > P diesel.

In the tomato fruits at 128 DAT the hydrocarbons modified significantly ($P \leq 0.05$) the mineral

concentrations respect to corresponding test treatments, with significant increments greater than 100% for Ca gasoline, and 24.8% for N diesel, and significant decrements from 75.5 > 57.5 > 36.2 > 27.5 > 25% for Mn gasoline > Na gasoline > N gasoline > Na diesel > Na benzene.

Exposure time of hydrocarbons from 100 to 128 DAT increased the mineral concentrations of N (diesel 20 mg L⁻¹) and Ca (gasoline 50 and 60 mg L⁻¹), and affected negatively about the reduction of mineral concentrations of N (gasoline 50 and 60 mg L⁻¹), Na (diesel 20 mg L⁻¹, gasoline 40, 50 and 60 mg L⁻¹, and benzene 75 mg L⁻¹), and Mn (40 mg L⁻¹) (Table 3).

Significant changes in the mineral concentrations of Mg, Fe and Zn in the fruit were not observed, which only the Fe accumulation increased significantly in the stem with gasoline 60 mg L⁻¹, and is well known that minerals and photosynthates transported to the fruit were originated from the roots and leaves and moved through the stems (Mengel and Viro, 1974). These results suggest that changes in the mineral concentration in the different organs were independent of each other and possibly depended on other regulators or signals

Table 3. Mineral concentration in the fruits of tomato plants treated with hydrocarbons to different concentrations at the 2- and 6-cluster (100 and 128 DAT).

Treatment	N	P	K	Ca	Mg	Na	Fe	Cu	Zn	Mn
mg L ⁻¹	----- g kg ⁻¹ -----									
100 DAT										
Test	17.85ab	5.60a	22.57abc	1.14b	1.89ab	0.46a	44.31a	9.16b	23.16a	2.78c
Diesel 20	18.75ab	4.43b	17.03cd	0.92b	1.66b	0.31ab	220.98a	8.10b	25.18a	4.84bc
Diesel 25	22.68a	5.77a	25.14ab	1.31b	1.95a	0.28ab	54.28a	9.10b	46.58a	1.56c
Gasoline 40	19.86ab	5.54a	20.43bcd	1.16b	1.91a	0.26ab	40.92a	9.36b	18.08a	2.24c
Gasoline 50	18.46ab	5.40a	28.88a	2.11a	1.85ab	0.50a	63.73a	8.86b	76.28a	11.04a
Gasoline 60	15.12b	5.03ab	23.35abc	2.05a	1.77ab	0.15b	43.42a	34.04a	25.32a	9.56ab
Benzene 75	23.66a	5.28a	14.40d	0.94b	1.77ab	0.24ab	36.96a	8.26b	24.96a	1.74c
128 DAT										
Test	22.22bc	3.44a	24.32ab	0.79b	1.95a	0.40a	187.08ab	10.26a	19.70ab	14.54ab
Diesel 20	27.73a	3.68a	23.04b	0.75b	1.92a	0.33ab	225.77ab	10.04a	20.12ab	13.20abc
Diesel 25	23.49ab	3.30a	27.48ab	0.89b	1.84a	0.29bc	76.45b	8.32a	19.14ab	8.08bc
Gasoline 40	21.96bc	2.96a	25.04ab	0.93b	1.76a	0.28bc	306.10ab	7.28a	15.26b	3.56c
Gasoline 50	14.18d	3.07a	29.13ab	1.97a	1.75a	0.23cd	296.16ab	8.62a	20.24a	13.22abc
Gasoline 60	16.08d	3.47a	35.10a	2.06a	1.77a	0.17d	435.68a	14.44a	17.20ab	22.16a
Benzene 75	17.23cd	3.18a	26.31ab	0.96b	1.69a	0.30bc	64.05b	7.36a	15.26b	7.71bc

Mineral concentrations are based on dry mass. Different letters in the same column in each harvest date indicate significant differences (Fisher's LSD, $\alpha \leq 0.05$).

distinct from the mineral concentration in each organ (Hermans *et al.*, 2006). It is advisable to expand the analytical determinations that are performed on plants treated with hydrocarbons, such as the enzyme activity and transcriptome studies, as has been reported by Mutz *et al.* (2013).

Gasoline showed the clearer significant changes, with increments in the Fe and Mn concentrations in stems and leaves, decrements in the Mg concentration in roots and stem, and the Na concentration in roots and leaves. At the same time, the gasoline increased the Ca concentration and decreased the Na concentration from 100 to 128 DAT on the fruiting stage. On the other hand, no matter the applied hydrocarbon, Mg was reduced in roots and stems and raised in leaves, maybe following its presence in the leaves in the form of the chlorophyll molecule.

Concentrations of Mo, Ni, Pb, and Cd were below the ICP's limit of detection in all plant organs at the both sampling times.

Fruit pH, EC, and TDS

Regarding the fruit quality variables, the hydrocarbons did not modify significantly the pH ($P > 0.05$) respect to test treatment. EC only increased significantly ($P \leq 0.05$) with diesel 25 mg L⁻¹ respect to test treatment, equivalent to 43.4%. TDS increased significantly ($P \leq 0.05$) with diesel 20 mg L⁻¹ respect to test treatment, equivalent to 27.8%. It was observed that only the MHF increased quantitatively the pH, EC and TDS (Figure 3).

CONCLUSIONS

- Hydrocarbon concentrations did not modify the leachate EC at the flowering stage (28 DAT), and the exposure time influenced the LHF increase the leachate EC with gasoline 60 mg L⁻¹ but decrease it with benzene 75 mg L⁻¹ at the fruiting stage (132 DAT). Leachate pH at the flowering stage decreased in the higher concentrations of the three used hydrocarbons (diesel 25 mg L⁻¹, gasoline 60 mg L⁻¹ and benzene 75 mg L⁻¹), whilst in the fruiting stage the leachate pH increased with LHF and decreased with MHF. The changes observed in the leachate pH and EC were related to exposure time of hydrocarbons and not due to the presence of hydrocarbons.

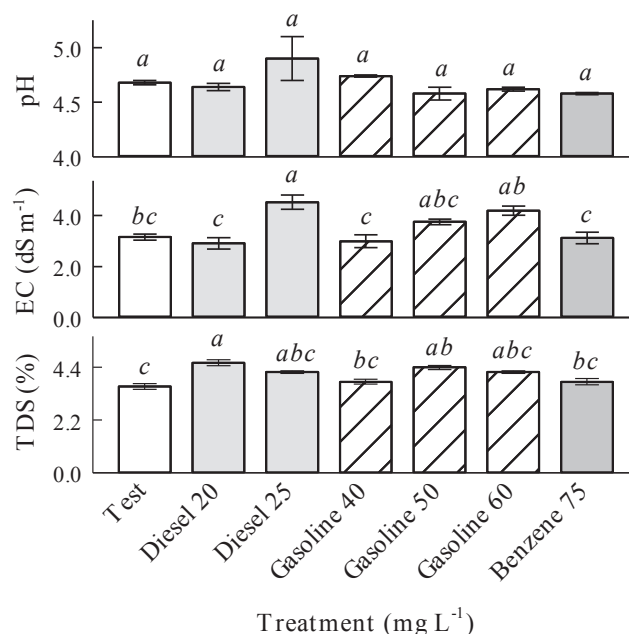


Figure 3. Mean values and standard error of fruit pH, EC and TDS in tomato plants treated with hydrocarbons to different concentrations at the 6-cluster (128 DAT). Different letters above the bars in the same variable indicate significant differences (Fisher's test, $\alpha \leq 0.05$).

- Plant morphology in the flowering stage (28 DAT) was not modified by LHF, except gasoline 40 mg L⁻¹ increased the stem diameter. MHF showed opposite effects in the plant morphology, due to increased the stem diameter and plant height with diesel 20 mg L⁻¹, but reduced the leaf and stem dry weights with diesel 25 mg L⁻¹.

- In the fruiting stage (132 DAT) the hydrocarbon did not modify the fruit dry weight and stem diameter. MHF did not modify the plant morphology, except diesel 25 mg L⁻¹ decreased the leaf dry weight. LHF modified the plant morphology in opposite way, that is, reduced the leaf dry weight (gasoline 50 mg L⁻¹) and the stem dry weight (gasoline 40, 50 mg L⁻¹ and benzene 75 mg L⁻¹), and increased the plant height (gasoline 50 mg L⁻¹).

- The mineral concentration in the fruiting stage (132 DAT) in the roots improved the N gasoline > P benzene > P diesel > Ca benzene, but were reduced the Na benzene > Na gasoline > Mg gasoline. In the stem increased the Fe gasoline > Mn gasoline, but reduced the Cu gasoline > Cu benzene > Cu diesel > Mg gasoline > Zn gasoline > Zn diesel > Mg benzene > Mg diesel > Ca gasoline. In the leaves were increased the Fe

gasoline > Mg gasoline > N diesel > Mn gasoline, but decreased the Na with gasoline. The Fe and Zn mineral concentration were not affected by the hydrocarbons, and the Cu and Mn were improved on the 100 DAT.

- The mineral concentration in the tomato fruits at 100 DAT improved the Mn gasoline > Cu gasoline > Ca gasoline, but decreased the Na gasoline > Cu benzene > P diesel. Whilst at 132 DAT were increased the Ca gasoline > N diesel, but decreased the Mn gasoline > Na gasoline > N gasoline > Na diesel > Na benzene. Mineral concentrations of N showed antagonism to hydrocarbon exposure time, due to it was improved by the MHF and decreased with the LHF.

- Fruit pH, EC and TDS were increased quantitatively only by the MHF. All hydrocarbon treatments did not modify the pH, while the EC increased with diesel 25 mg L⁻¹, and the TDS increased with diesel 20 mg L⁻¹. In future researches related to hydrocarbons in agricultural crops, it is advisable quantify the hydrocarbon partition in the plant canopy, including the hydrocarbon translocation in the cell and vegetables tissues, stem, leaves, flowers and fruits.

REFERENCES

- Adams, R. H., J. Zavala-Cruz, and F. A. Morales-García. 2008. Residual concentration of hydrocarbons in soil in the tropics. II: Impacts to fertility and reclamation. *Interciencia* 33: 483-489.
- Adams-Schroeder, R. H. 1999. Recuperación con mangle blanco (*Laguncularia racemosa*) de áreas impactadas por hidrocarburos y su manejo como agrosilvo-ecosistema en la zona costera de Huimanguillo y Cárdenas, Tabasco. Universidad Juárez Autónoma de Tabasco. SNIB-CONABIO proyecto No. M076. México D. F.
- Altamirano-Sánchez, E. y G. Fernández-Villagómez. 2001. Prácticas apropiadas para disminuir los riesgos ambientales por el manejo de gasolina en estaciones de servicio. Centro Nacional de Prevención de Desastres. CI/RQ-10122001. México D. F. ISBN: 970-628-616-0.
- AOAC (Association of Official Analytic Chemists). 1980. Official methods of analysis. 13th Edition. AOAC. Washington, DC, USA. ISBN: 0-935584-14-5.
- Bravo, E. 2005. Impactos de la explotación petrolera en América Latina. *Biodiversidad* 43: 1-9.
- Clark, C. E. and J. A. Veil. 2009. Produced water volumes and management practices in the United States. Argonne National Laboratory. Illinois, US. doi: 10.2172/1007397.
- CONAGUA (Comisión Nacional del Agua). 2016. Estadísticas del agua en México, Edición 2016. Comisión Nacional del Agua. Ciudad de México, México.
- Demirbas, A. 2008. Biofuels sources, biofuel policy, biofuel economy and global biofuel projections. *Ener. Conver. Manage.* 49: 2106-2116. doi: <https://doi.org/10.1016/j.enconman.2008.02.020>.
- Dubey, S., M. Shri, P. Misra, D. Lakhwani, S. K. Bag, M. H. Asif, P. K. Trivedi, R. D. Tripathi, and D. Chakrabarty. 2014. Heavy metals induce oxidative stress and genome-wide modulation in transcriptome of rice root. *Funct. Integr. Genomics* 14: 401-417. doi: 10.1007/s10142-014-0361-8.
- FAO/WHO (Food and Agriculture Organization of the United States-World Health Organization). 2011. Benzene. pp. 6. In: FAO/WHO (eds.). Joint FAO/WHO food standards programme codex committee on contaminants in foods. The Hague, The Netherlands.
- Heiss-Blanquet, S., Y. Benoit, C. Maréchaux, and F. Monot. 2005. Assessing the role of alkane hydroxylase genotypes in environmental samples by competitive PCR. *J Appl Microbiol* 99: 1392-1403. doi: 10.1111/j.1365-2672.2005.02715.x.
- Hermans, C., J. P. Hammond, P. J. White, and N. Verbruggen. 2006. How do plants respond to nutrient shortage by biomass allocation? *Trends Plant Sci.* 11: 610-617. doi: 10.1016/j.tplants.2006.10.007.
- Herod, A. A., K. D. Bartle, and R. Kandiyoti. 2007. Characterization of heavy hydrocarbons by chromatographic and mass spectrometric methods: An overview. *Ener. Fuels* 21: 2176-2203. doi: <https://doi.org/10.1021/ef060642t>.
- Himmel, D., S. K. Goll, I. Leito, and I. Krossing. 2010. A unified pH scale for all phases. *Angew. Chem. Int. Ed.* 49: 6885-6888. doi: <https://doi.org/10.1002/anie.201000252>.
- Holwerda, H. T. 2006. Specialty plant nutrition management guide, tomato. SQM. Cropkit. 84 p.
- Jackson, L. and J. Myers. 2002. Alternative use of produced water in aquaculture and hydroponic systems at naval petroleum reserve No. 3. Proceedings of the 2002 GWPC Produced Water Conference. Colorado Springs, CO, USA. [Online]. http://www.gwpc.org/sites/default/files/event-sessions/Lorri_Jackson_PWC2002_0.
- Joner, E. J., C. Leyval, and J. V. Colpaert. 2006. Ectomycorrhizas impede phytoremediation of polycyclic aromatic hydrocarbons (PAHs) both within and beyond the rhizosphere. *Environ. Pollut.* 142: 34-38. doi: 10.1016/j.envpol.2005.09.007.
- Manfra, L., C. Maggi, J. Bianchi, M. Mannozi, O. Faraponova, L. Mariani, F. Onorati, A. Tornambè, C. Virno-Lamberti, and E. Magaletti. 2010. Toxicity evaluation of produced formation waters after filtration treatment. *Natl. Sci.* 2: 33-40. doi: <http://dx.doi.org/10.4236/ns.2010.21005>.
- Martel-Valles, J. F., A. Benavides-Mendoza, L. A. Valdez-Aguilar, A. Juárez-Maldonado, and N. A. Ruiz-Torres. 2013. Effect of the application of produced water on the growth, the concentration of minerals and toxic compounds in tomato under greenhouse. *J. Environ. Prot.* 4: 138-146. doi: 10.4236/jep.2013.47A016.
- Martel-Valles, J. F., A. Benavides-Mendoza, R. Mendoza-Villarreal, A. Zermeno-González, and A. Juárez-Maldonado. 2014. Agronomic use of produced water in tomato plants (*Lycopersicon esculentum* L.) under greenhouse conditions. *Rev. Int. Contam. Ambient.* 30: 365-377.
- Martel-Valles, J. F., R. Foroughbakchik-Pournavab, and A. Benavides-Mendoza. 2016. Produced waters in the oil industry as an alternative water resource for food production. *Rev. Int. Contam. Ambient.* 32: 463-475. doi: <http://dx.doi.org/10.20937/RICA.2016.32.04.10>.
- Martínez M., V. E. y F. López S. 2001. Efecto de hidrocarburos en las propiedades físicas y químicas de suelo arcilloso. *Terra* 19: 9-17.

- Mengel, K. and M. Viro. 1974. Effect of potassium supply on the transport of photosynthates to the fruits of tomatoes (*Lycopersicon esculentum*). *Physiol. Plant* 30: 295-300. doi: <https://doi.org/10.1111/j.1399-3054.1974.tb03660.x>.
- Moya, A., J. Rexach y M. T. Navarro-Gochicoa. 2015. Efecto de la deficiencia en boro sobre la expresión de genes implicados en la ruta de señalización del calcio en el mutante cax3 de *Arabidopsis thaliana*. *Biosaia* 4: 1.
- Mutz, K. O., A. Heilkenbrinker, M. Lönne, J. G. Walter, and F. Stahl. 2013. Transcriptome analysis using next-generation sequencing. *Curr. Opin. Biotechnol.* 24: 22-30. doi: 10.1016/j.copbio.2012.09.004.
- NOM-001-ECOL-1996 (Norma Oficial Mexicana). 1997. Que establece los límites máximos permisibles de contaminantes en las descargas de aguas residuales en aguas y bienes nacionales. SEMARNAP. México, D. F.
- NOM-143-SEMARNAT-2003 (Norma Oficial Mexicana). 2005. Que establece las especificaciones ambientales para el manejo de agua congénita asociada a hidrocarburos. SEMARNAT. México, D. F.
- NOM-138-SERMANAT/SSAI-2012 (Norma Oficial Mexicana). 2013. Límites máximos permisibles de hidrocarburos en suelos y lineamientos para el muestreo en la caracterización y especificaciones para la remediación. SEMARNAT. México, D. F.
- Pentreath, V., E. González, M. Barquin, S. M. Ríos, and S. Perales. 2015. Acute toxicity bioassay with native plants to evaluate an oil spill. *Rev. Salud Ambient.* 15: 13-20.
- Pessaraki, M. 2011. Handbook of plant and crop stress. CRC Press Taylor & Francis Group. Boca Raton, FL, USA. ISBN: 9781439813966.
- Petenello, M. C., C. Beltrán y S. R. Feldman. 2014. Efecto del agregado de diésel-oil sobre algunos parámetros microbiológicos del suelo con y sin presencia de plantas. *Terra Latinoamericana* 32: 301-309.
- Quiñones-Aguilar, E. E., R. Ferrera-Cerrato, F. Gavi-Reyes, L. Fernández-Linares, R. Rodríguez-Vázquez, and A. Alarcón. 2003. Emergence and growth of maize in a crude oil polluted soil. *Agrociencia* 37: 585-594.
- R Core Team. 2015. R: A Language and environment for statistical computing. R Foundation for Statistical Computing. Vienna, Austria. Available: <https://www.R-project.org>. (Accessed: December 12, 2015).
- Rivera-Cruz, M. C. y A. Trujillo-Narcía. 2004. Estudio de toxicidad vegetal en suelos con petróleos nuevo e intemperizado. *Interciencia* 29: 369-376.
- Rojas-Loria, C., M. R. Peralta-Perez, L. Buendia-Gonzalez, and T. L. Volke-Sepulveda. 2012. Effect of a saprophytic fungus on the growth and the lead uptake, translocation and immobilization in *Dodonaea viscosa*. *Int. J. Phytoremed.* 14: 518-529. doi: 10.1080/15226514.2011.604980.
- Saval, S., F. Lara, J. M. Lesser, and J. M. Nieto. 2004. Contaminación de acuíferos con hidrocarburos: Causas, efectos, riesgos asociados y medidas de prevención. pp. 233-250. *In*: B. Jiménez y L. Marín (eds.). El agua en México vista desde la Academia. Academia Mexicana de Ciencias. México, D. F. ISBN: 968-7428-22-8.
- Sri Ranjan, R., Y. Qian, and M. Krishnapillai. 2006. Effects of electrokinetics and cationic surfactant cetyltrimethylammonium bromide [CTAB] on the hydrocarbon removal and retention from contaminated soils. *Environ. Technol.* 27: 767-776. doi: 10.1080/09593332708618686.
- Steiner, A. A. 1961. A universal method for preparing nutrient solutions of a certain desired composition. *Plant Soil* 15: 134-154. doi: <https://doi.org/10.1007/BF01347224>.
- Stirk, W. A. and J. van Staden. 2014. Plant growth regulators in seaweeds: occurrence, regulation and functions. *Adv. Bot. Res.* 71: 125-159. doi: <https://doi.org/10.1016/B978-0-12-408062-1.00005-6>.
- Trejo, D., C. Moreira, I. Bañuelos, L. Lara, G. Alafita, and A. Reyes. 2013. Effect of diesel and biodiesel on the growth of *Brachiaria decumbens* inoculated with arbuscular mycorrhizal fungi. *Trop. Subtrop. Agroecosyst.* 16: 391-398.
- Veil, J. A., M. G. Puder, D. Elcock, and R. J. Redweik. 2004. A white paper describing produced water from production of crude oil, natural gas, and coal bed methane. U.S. Department of Energy National Energy Technology Laboratory. USA. doi: 10.2172/821666.